

Service Instruction Retailer Patch-Tool Model series 9/10

SA-012




Dr. Fenyves
und Gut
Deutschland GmbH

Dr. Fenyves und Gut Deutschland GmbH, Daimlerstr. 23, 72414 Rangendingen

1. Patch-Tool

- Connect the device to the PC via the USB cable

- Start the „P9P10_Tool.exe“ icon: 

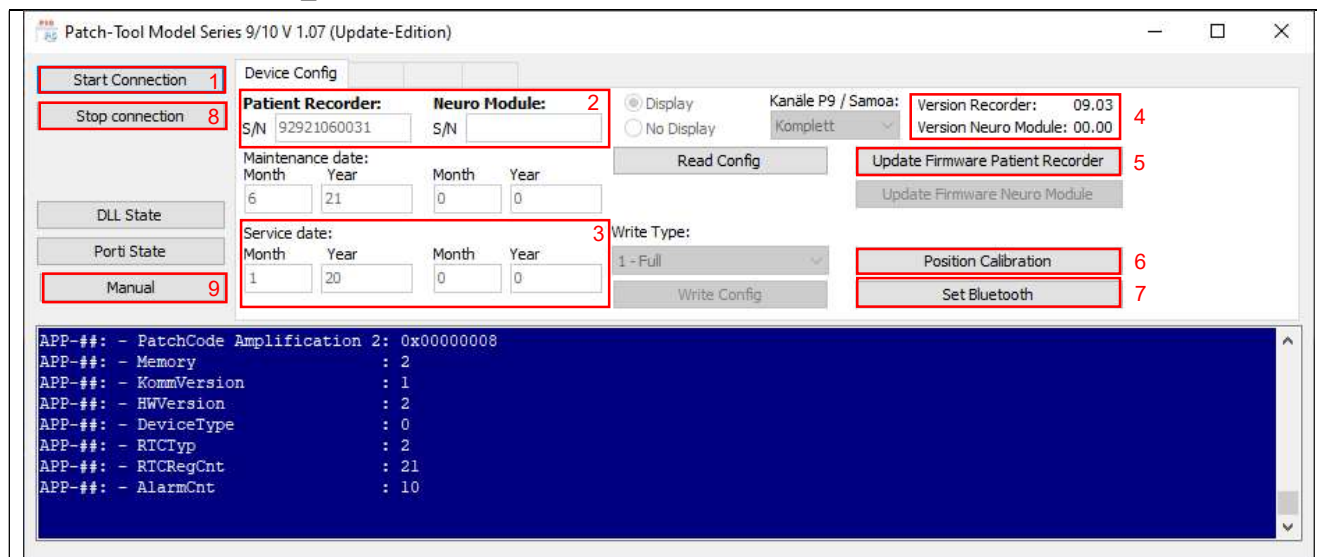

1	Start Connection
2	Serial number
3	Service date
4	Firmware version
5	Update the firmware via the USB cable * / **
6	Calibration of the internal position sensor *
7	Set Bluetooth (only model series 9 from firmware 9.3) **
8	Stop connection
9	Manual

*	When updating the firmware via USB the position calibration is started automatically after the update is complete. The position calibration via button 8 is only necessary if the position calibration must be carried out without a firmware update. The displayed instructions must be observed and executed.
**	This applies exclusively to the model series 9: When updating the firmware via USB, it is not necessary to set Bluetooth manually, because after the firmware update via USB is completed, the position calibration and the setting of Bluetooth is started automatically. Setting Bluetooth via button 9 is only necessary if this setting is to be performed without a firmware update. The displayed instructions must be observed and executed.

Template SA-00-29.11.2021

Document name:	SA-012 Retailer Patch-Tool Model series 9/10				Rev.	01
Created by:	Sascha Bodmer	Reviewed by:	Rainer Baumann	Released by:	Timo Flaiz	Page
Date:	06.07.2023	Date:	24.08.2023	Date:	24.08.2023	1 / 2